



# FDM Nylon 6

## PRODUCTION-GRADE THERMOPLASTIC FOR FORTUS 3D PRINTERS

FDM Nylon 6™ combines strength and toughness superior to other FDM thermoplastics, for applications that require strong, customized parts and tooling that lasts longer and withstands rigorous functional testing.

Engineered with nylon 6, a popular thermoplastic for manufacturing, this material works with the Fortus 900mc™ to produce durable parts with a clean finish and high break resistance. FDM Nylon 6 is ideal for product manufacturers and development engineers in automotive, aerospace, consumer goods and industrial manufacturing.

| CONDITIONED*  |             |               |              |           |           |
|---|-------------|---------------|--------------|-----------|-----------|
| MECHANICAL PROPERTIES <sup>1</sup>                    | TEST METHOD | ENGLISH       |              | METRIC    |           |
|   |             | XZ Axis       | ZX Axis      | XZ Axis   | ZX Axis   |
| Tensile Strength, Yield (Type 1, 0.125", 0.2"/min)    | ASTM D638   | 7,150 psi     | 4,200 psi    | 49.3 MPa  | 28.9 MPa  |
| Tensile Strength, Ultimate (Type 1, 0.125", 0.2"/min) | ASTM D638   | 9,800 psi     | 5,300 psi    | 67.6 MPa  | 36.5 MPa  |
| Tensile Modulus (Type 1, 0.125", 0.2"/min)            | ASTM D638   | 323,700 psi   | 263,500 psi  | 2,232 MPa | 1,817 MPa |
| Elongation at Break (Type 1, 0.125", 0.2"/min)        | ASTM D638   | 38%           | 3.2%         | 38%       | 3.2%      |
| Elongation at Yield (Type 1, 0.125", 0.2"/min)        | ASTM D638   | 2.3%          | 1.7%         | 2.3%      | 1.7%      |
| Flexural Strength (Method 1, 0.05"/min)               | ASTM D790   | 14,100 psi    | 11,900 psi   | 97.2 MPa  | 82 MPa    |
| Flexural Modulus (Method 1, 0.05"/min)                | ASTM D790   | 318,500 psi   | 272,500 psi  | 2,196 MPa | 1,879 MPa |
| Flexural Strain at Break                              | ASTM D790   | No Break      | No Break     | No Break  | No Break  |
| IZOD impact - notched (Method A, 23 °C)               | ASTM D256   | 2.0 ft-lb/in  | 0.8 ft-lb/in | 106 J/m   | 43 J/m    |
| IZOD impact - unnotched (Method A, 23 °C)             | ASTM D256   | 53.8 ft-lb/in | 3.6 ft-lb/in | 2,873 J/m | 192 J/m   |

STRATASYS.COM



A GLOBAL LEADER IN APPLIED ADDITIVE TECHNOLOGY SOLUTIONS



# FDM Nylon 6

## PRODUCTION-GRADE THERMOPLASTIC FOR FORTUS 3D PRINTERS

### At the core:

#### Advanced FDM Technology

FDM® (fused deposition modeling) technology works with engineering-grade thermoplastics to build strong, long-lasting and dimensionally stable parts with the best accuracy and repeatability of any 3D printing technology. These parts are tough enough to be used as advanced conceptual models, functional prototypes, manufacturing tools and production parts.

#### Meet production demands

FDM systems are as versatile and durable as the parts they produce. Advanced FDM 3D Printers boast the largest build envelopes and material capacities in their class, delivering longer, uninterrupted build times, bigger parts and higher quantities than other additive manufacturing systems, delivering high throughput, duty cycles and utilization rates.

#### Opening the way for new possibilities

FDM 3D Printers streamline processes from design through manufacturing, reducing costs and eliminating traditional barriers along the way. Industries can cut lead times and costs, products turn out better and get to market faster.

#### No special facilities needed

FDM 3D Printers are easy to operate and maintain compared to other additive fabrication systems because there are no messy powders or resins to handle and contain, and no special venting is required because FDM systems don't produce noxious fumes, chemicals or waste.

| THERMAL PROPERTIES <sup>1</sup> | TEST METHOD | ENGLISH | METRIC |
|---------------------------------|-------------|---------|--------|
| Heat Deflection (HDT) @ 264 psi | ASTM D648   | 199 °F  | 93 °C  |

| SYSTEM AVAILABILITY | LAYER THICKNESS CAPABILITY                     | SUPPORT MATERIAL | COLOR   |
|---------------------|--|------------------|---------|
| Fortus 900mc        | 0.010 inch (0.254 mm)<br>0.013 inch (0.330 mm) | SR-110           | ■ Black |

<sup>1</sup>Conditioned = 20 °C and 50% RH for 40 hours

The information presented are typical values intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. End-use material performance can be impacted (+/-) by, but not limited to, part design, end-use conditions, test conditions, etc. Actual values will vary with build conditions. Tested parts were built on Fortus 400mc™ @ 0.010" (0.254 mm) slice. Product specifications are subject to change without notice.

The performance characteristics of these materials may vary according to application, operating conditions, or end use. Each user is responsible for determining that the Stratasys material is safe, lawful, and technically suitable for the intended application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations. Stratasys makes no warranties of any kind, express or implied, including, but not limited to, the warranties of merchantability, fitness for a particular use, or warranty against patent infringement.


<sup>1</sup>Literature value unless otherwise noted.

Orientation: See Stratasys Testing white paper for more detailed description of build orientations.

XZ = X or "on edge"

XY = Y or "flat"

ZX = or "upright"

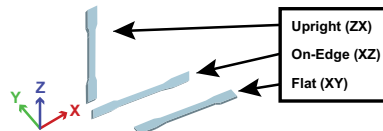

STRATASYS.COM

ISO 9001:2008 Certified

©2016, 2017 Stratasys Inc. All rights reserved. Stratasys, Stratasys signet, FDM, Fortus and Finishing Touch are registered trademarks of Stratasys Inc. FDM Technology, Fused Deposition Modeling, Fortus 400mc, Fortus 450mc, Fortus 900mc, Insight, Control Center, FDM Nylon 6, Smart Supports, SR-30, SR-100, FDM Nylon 6 and TouchWorks are trademarks of Stratasys, Inc. \*ULTEM is a trademark of SABIC Innovative Plastics IP BV. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance, or use of these non-Stratasys products. Product specifications subject to change without notice. Printed in the USA. MSS\_FDM\_Nylon6\_EN\_1117a

#### HEADQUARTERS

7665 Commerce Way, Eden Prairie, MN 55344

+1 888 480-3548 (US Toll Free)

+1 952 937-3000 (Intl)

+1 952 937-0070 (Fax)

1 Holtzman St., Science Park, PO Box 2496

Rehovot 76124, Israel

+972 74 745-4000

+972 74 745-5000 (Fax)